



Measurements

CROSS SECTION

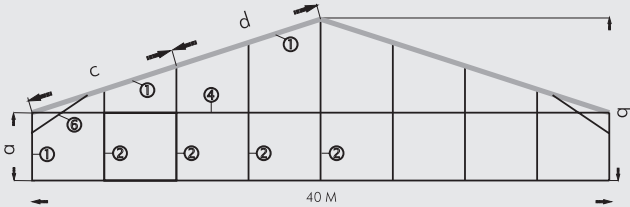


	Baseplates
a. Eave height	4.00m
b. Ridge height	10.67m
c. Length roofbeam	10.70m
d. Length extension roofbeam	10.34m
e. Windbracing	Side: diameter 10mm Roof: diameter 10mm
l. Bay distance	5m

TOP VIEW

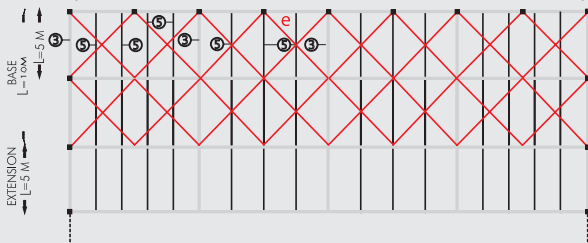

Maximum 25m without windbracings

PARTS SPECIFICATION

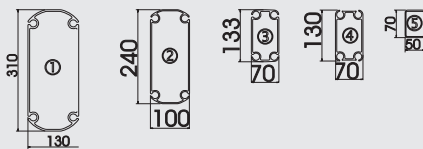

- |                      |                        |
|----------------------|------------------------|
| 1. Leg and roofbeam  | 4. Gable horizontal    |
| 2. Gable upright     | 5. Intermediate purlin |
| 3. Eave/ridge purlin | 6. Eave bracing        |

## A Structure of the Highest Quality

The classical design which has a multitude of applications such as exhibitions, conferences, logistical solutions, corporate hospitality and product launches.

Our PVC is manufactured from the highest quality Serge Ferrari fabric and is available in:

- standard translucent - maximising light
- opaque to provide total black-out for presentations
- crystal when you want to optimise a view or feature

Structures can be fitted with an integral cassette flooring system and with a variety of wall finishes and entrances.

The structure is designed in accordance with the British BS6399, German DIN 4112, French CTS and Eurocode.

Weight (kg)

	Base	Extension + Windbracing	Extension
Frame	9127	1843	1801
Fabric	1170	248	248
<b>Total</b>	<b>10297</b>	<b>2091</b>	<b>2049</b>

Longest Part 10700mm

Time

Assembly Time

Base:	04:00H with 8 skilled people
Extensions:	02:15H with 8 skilled people

Dismantling Time

Base:	03:30H with 7 skilled people
Extension:	02:00H with 7 skilled people

Extra Tools For more information please contact us.